

Data Sheet

FUJITSU ATX Mainboard D3348-B

Extended Lifecycle Series

Powered by the Intel® C612 series chipset, quad channel DDR4 2133/2400 SDRAM memory (ECC support) and Intel® Xeon® / Intel® Core™ i7 processors (LGA2011-R3)
Designed & approved for 24/7 continuous operation

Chipset:

Intel® C612 Chipset


Processors:

Intel® Xeon® Processor E5-26xx [V3] series
Intel® Xeon® Processor E5-16xx [V3] series
Intel® Core™ i7 Processor 59xx series
Intel® Xeon® Processor E5-26xx [V4] series
Intel® Xeon® Processor E5-16xx [V4] series
Intel® Core™ i7 Processor 69xx series
Intel® Core™ i7 Processor 6850K
Compatible with Intel® processors LGA2011-R3 (up to 160W TDP)






Memory:

DDR4 2133 SDRAM (quad channel)
DDR4 2400 SDRAM (quad channel)
RDIMM / LRDIMM / RDIMM 3DS with ECC Support (XEON only)
UDIMM (Core™ i7 only)
(memory type/speed and ECC depends on processor)
Up to 512GB (XEON) / 128GB (Core™ i7) memory

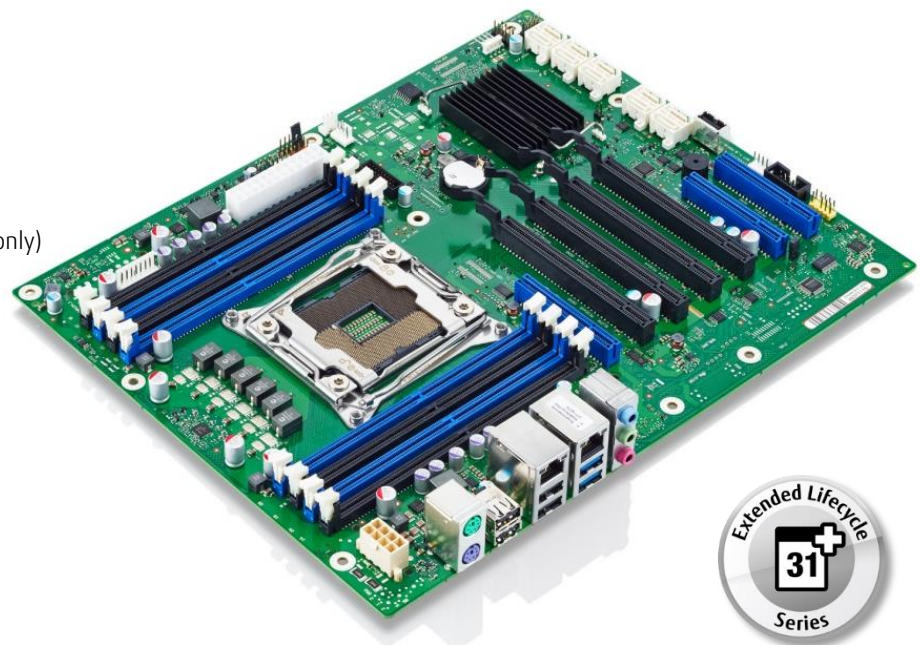

Product Features:

2 x PCIe x16 – generation 3 onboard
5.1 multichannel audio onboard
USB 2.0 and USB 3.0 onboard
Dual Intel GbE LAN supporting iAMT / vPro & Teaming
10 x Serial ATA III incl. RAID onboard
Trusted Platform Modul (Infineon) V1.2 / V2.0 onboard
BIOS-POST/-Boot & OS - HW Watchdog onboard
Support for M.2 SSD modules via D3352 carrier board



Features and benefits

Board Size ATX: 12" x 9.6" (305 x 244 mm)

Chipset Intel® "Wellsburg" C612 Series Chipset

Memory
 8 DIMM Sockets DDR4, max. 128 / 512GB, Single / Dual / Triple / Quad Channel, 2133MHz (CL15) / 2400MHz (CL17), single- / dual- / quad-rank RDIMM, RDIMM 3DS or LRDIMM (XEON only), resp. UDIMM (Core™ i7 only, max. 128GB), 1.2V/2.5V, 288-pin, ECC (RDIMM) / non-ECC (UDIMM).
 Effective memory speed and ECC (XEON only) depends on installed processor


Processors
 Intel® Xeon® processor E5-16xx / 26xx V3 series
 Intel® Xeon® processor E5-16xx / 26xx V4 series (D3348-B2 only)
 Intel® Core™ i7 Processor 59xx series ¹⁾
 Intel® Core™ i7 Processor 69xx series (D3348-B2 only) ¹⁾
 Intel® Core™ i7 Processor 6850K (D3348-B2 only) ¹⁾
 Socket R3 (LGA2011), max. 160W TDP, integrated Memory Controller
 (For details on supported processors please refer to our website)

Power Specification
 24 Pin Power Connector + 8 Pin (12V) Power Connector required
 Support for Soft-Off Power Supplies; 12V and 3.3V Supply Voltage on PCIe Slots
 3.3V Auxiliary Supply Voltage on PCIe Slots (Wake-Up Function)
 On board CPU Voltage Regulator, 5V / 2A Auxiliary Power
 required for USB Wake-Up from Save-to-RAM, Save-to-Disk

Power Supply Requirements

Source	Voltage	Min. PS Load	Max. Voltage Tolerance	Mainboard Capacitive Load	Mainboard Max. Current (continuous)
Main Power Supply	+ 12 V _{CPU} (Rail#1)	0.5A ^{A)}	± 5 %	1.000µF	~16A ^{A)}
	+ 12 V _{CPU} (Rail#3)			1.000µF	
	+ 12 V _{Sys} (Rail#2)	0.2A	± 5 %	1.000µF	~19A ^{B)}
	- 12V	0A	± 10 %	--	--
	+ 5V	0.2A	± 5 %	2.200µF	~ 25A ^{B)}
Aux	+ 3.3V	0.5A	± 5 %	1.200µF	~ 21A ^{B)}
Aux	+ 5V _{aux}	0A	+ 5 % / -3%	2.200µF	~ 2A

A) Combined load for Rail1 & Rail3. Note: Processor peak current = 32A (<250ms)!
 B) Depends on system configuration (Main focus: 12V/3.3V: PCIe Slots; 5V: Memory/USB)

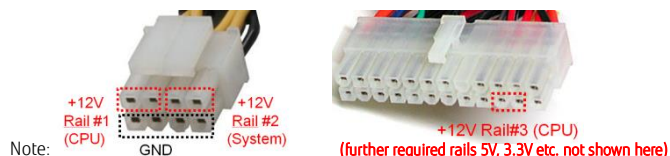

BIOS
 AMI Aptio 5.x (UEFI) BIOS
 modified and adapted by Fujitsu Technology Solutions; Recovery BIOS,
 BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot,
 Plug & Play, DRAM and PCIe Auto Configuration, S.M.A.R.T. Support,
 Boot support for M.2 SSD (PCIe-based AHCI modules,
 PCIe-based NVME modules [NVME for D3348-B2 only])

Security Features
 Recovery BIOS, System and BIOS Password, Boot Sequence Control,
 Serial/USB- Port Access Protection, Boot Sector Virus Warning,
 Write Protection for Flash BIOS, EraseDisk (optional BIOS Feature),
 Infineon Trusted Platform Module (TPM) V1.2-SLB9660 / V2.0-SLB9665.

Features	Mainboard Versions →	D3348-B1x	D3348-B2x
RDIMM DDR4-2133(max.256GB) / DDR4-2400(max.512GB)		x / -	x / x
UDIMM DDR4-2133 / DDR4-2400 (max. 128GB)		x / -	x / x
XEON E5-16xx/26xx V3 (Haswell) / V4 (Broadwell)		x / -	x / x
i7-59xx series (Haswell) / 69xx series & 6850K (Broadwell)		x / -	x / x
Infineon TPM V1.2 / Infineon TPM V2.0		x / -	- / x

Audio
 Realtek ALC671, 5.1 Multichannel, High Definition Audio

LAN
 Intel i217LM / Intel i210AT Ethernet Controller with 10/100/1000 MBit/s, iAMT, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display, Teaming Support

Drives
 10 x SATA III 600 Interfaces (up to 6Gbit/s, NCQ); AHCI; RAID 0, 1, 5, 10.
 Note: Two integrated controllers. #1 (SATA) = Port 0-5, #2 (sSATA) = Port 6-9


Special Features

Silent Fan	Independent temperature related processor fan and system fan supervision and control
System Guard	View and adjust Silent Fan features
Silent Drives	Noise reduction for optical and hard disk drives
Recovery BIOS	Restores a corrupted BIOS
Desk Update	Easy driver update with Drivers&Utilities DVD
Multi Boot	Comfortable boot from any boot device
HDD Password	Access protection for disk drives
24/7 Operation	Mainboard is designed for continuous operation
Boot Watchdog	Full supervision of BIOS POST and Boot sequence


Common Features	D3348-B
Board Size / Chipset	ATX / Intel C612
Stereo Audio / 5.1 Multichannel Audio	- / ✓
Buzzer / int. Speaker Support	✓ / ✓
Dual LAN Gbit / 100 Mbit / 10 Mbit	✓ / ✓ / ✓
LAN ASF 2.0 / DASH 1.1 / AoL / Boot / iAMT 9.1 / vPro	- / ✓ / - / ✓ / ✓ / ✓
SATA / ATA / RAID / eSATA Support	✓ / - / ✓ / ✓
FireWire™ / USB 2.0 / USB 3.0	- / ✓ / ✓
FAN controlled&monitored PSU ²⁾ / CPU / AUX1 / AUX2 / AUX3	✓ / ✓ / ✓ / ✓ / ✓
TEMP monitored CPU / Onboard Sensors	✓ / ✓
Special Features	
Silent Fan / Silent Fan LT / System Guard / Silent Drives	✓ / - / ✓ / ✓
Recovery BIOS / Desk Update / Multi Boot	✓ / ✓ / ✓
HDD Password / USB Security / EraseDisk ⁴⁾	✓ / ✓ / ✓
Logo Boot Option / Intel On Screen Branding	✓ / ✓
BIOS POST- / BIOS Boot- / OS- HW Watchdog	✓ / ✓ / ✓
Operating Mode 24-7 / 8-5 (hrs per day - days per week)	✓ / -
Mainboard operating temperature range (chassis inside)	10°C - 50°C
Support for M.2 SSD module (via M.2 carrier board D3352)	1 or 2 modules
Internal Connectors	
DIMM Sockets (DDR4 2133 or DDR4 2400)	8
PCI Express x16: 16lanes-gen3 / 4lanes-gen3 / 4lanes-gen2	2 / 1 / 1
PCI Express x8: 4 lanes-gen3 ⁵⁾ / 1 lane-gen2 ⁵⁾ / PCI Slots	1 / 2 / 0
SATA (600) / SATA (300) / ATA (100) / Floppy	10 / 0 / 0 / 0
S/PDIF / FireWire™ / Audio Input / Frontpanel HD Audio (9-Pin)	- / - / - / 1
USB 2.0 channels / USB 3.0 channels / socket for USB2.0 stick	4 / 2 / 1
Serial (FIFO, 16550 compatible) / SMBus (Temperature)	1 / -
FAN PSU ²⁾ / CPU / AUX1 / AUX2 / AUX3 ³⁾	1 / 1 / 1 / 1 / 1
Intrusion (Case Open) / LCD Status Display Support	1 / -
Parallel (EPP/ECP) Pin Connector	-
Power 24 Pin (BTX) / 8 Pin (additional 12V Supply)	1 / 1
External Connectors	
VGA Sub D / DVI	- / -
Audio Mic. In / Line in / Line out	1 / 1 / 1
LAN (RJ-45) / PS/2 Mouse / PS/2 Keyboard	2 / 1 / 1
FireWire™ / Serial (RS232) / Parallel (EPP/ECP)	- / - / -
USB 2.0 / USB 3.0	4 / 2

1) Note: D3348-B1: Core™ i7 -5820K not recommended. D3348-B2: Core i7-6800K is NOT recommended.
 2) Not supported by standard Power Supplies
 3) FAN PSU and FAN AUX3 must not be used simultaneously
 4) Optional BIOS Feature (License required) 5) PCIe x16 card can be inserted (open connector)

External Connectors

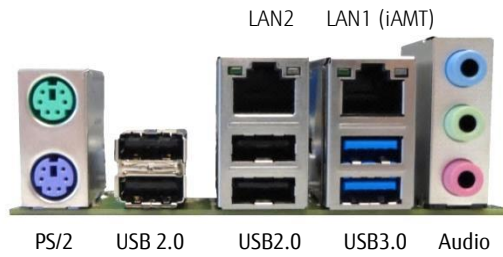

Connector / Socket Diagram

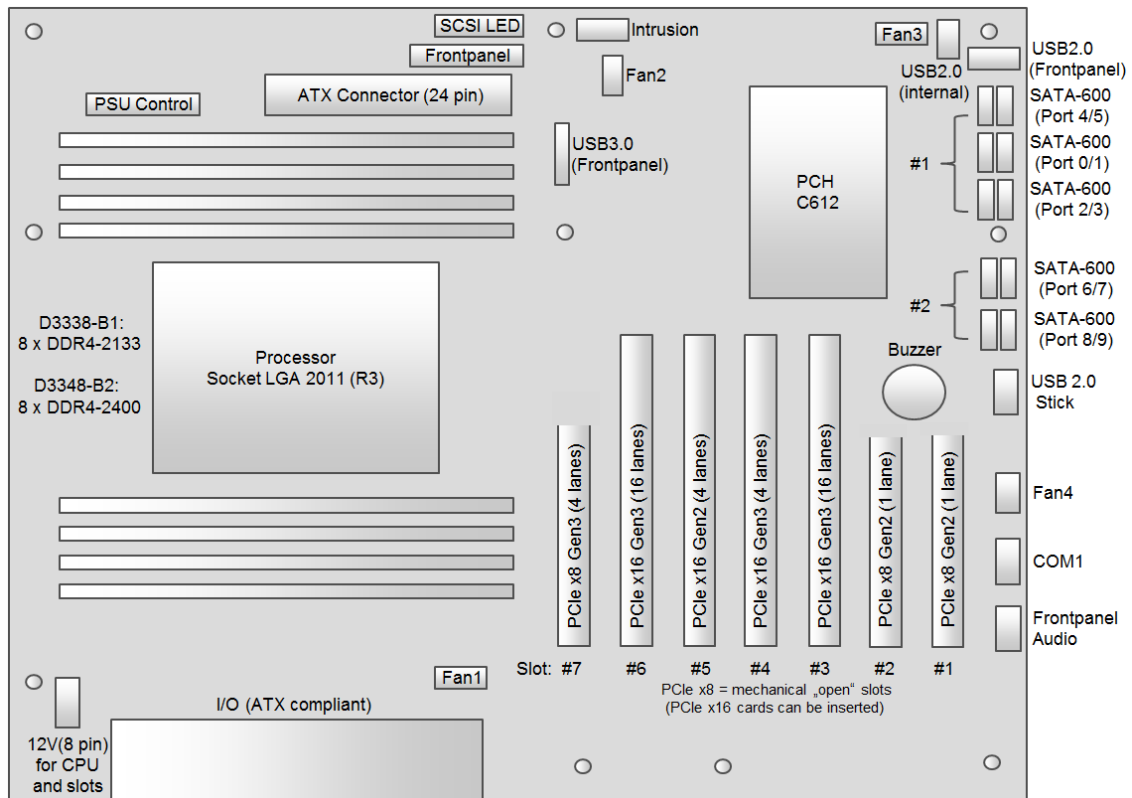

Accessories

Parallel Port Cable "ATX Slotbracket		S26361-F5000-K005
PCIe x1 DASH LAN Controller	D2907-A11	S26361-F5000-L001
M.2 Carrier Board	D3352-A2	S26361



Further industrial products offered by Fujitsu

- Connectors
- KVM Switches
- Relays
- Touch Panels
- Thermal Printers
- Wireless Modules



Contact:

Fujitsu Components Europe, B.V.
 Tel.: +31 (0)23 556 0910
 Fax: +31 (0)23 556 0950
 Website: emea.fujitsu.com/components
 Address: Diamantlaan 25
 2132 WV Hoofddorp
 Netherlands

More information

Fujitsu products, solutions & services

Products

www.fujitsu.com/global/products/

In addition to the Fujitsu [Product name], Fujitsu offers a full portfolio of other computing products.

Computing products

- Storage systems: ETERNUS
- Server: PRIMERGY, PRIMEQUEST, Fujitsu SPARC M10, BS2000/OSD Mainframe
- Client Computing Devices: LIFEBOOK, STYLISTIC, ESPRIMO, FUTRO, CELSIUS
- Peripherals: Fujitsu Displays, Accessories
- Software
- Network

Product Support Services with different service levels agreements are recommended to safeguard each product and ensure smooth IT operation.

Solutions

<http://www.fujitsu.com/global/solutions>

The Fujitsu solutions combine reliable Fujitsu products with the best in services, know-how and worldwide partnerships.

Fujitsu's Solutions include parts of one or more activity groups (e.g., planning, implementation, support, management, and training services) and are designed to solve a specific business need.

Infrastructure Solutions are customer offerings created by bringing Fujitsu's best products, services and technologies together with those from partners to deliver benefit to our customers' businesses.

Industry Solutions are tailored to meet the needs of specific verticals.

Business and Technology Solutions provide a variety of technologies developed to tackle specific business issues such as security and sustainability, across many verticals.

Services

www.fujitsu.com/global/services/

Several customizable Fujitsu Service offerings ensure that IT makes a real difference and delivers true business value. We do this by leveraging our extensive experience in managing large, complex, transformational IT programs to help clients in planning, delivering and operating IT services in a challenging and changing business environment.

Application Services support the development, integration, testing, deployment and on-going management of both custom developed and packaged applications. The services focus on delivering business and productivity improvements for organizations.

Business Services respond to the challenge of planning, delivering and operating IT in a complex and changing IT environment.

Managed Infrastructure Services enable customers to deliver the optimal IT environment to meet their needs – achieving high levels of IT service quality and performance for data center and end user environments.

Fujitsu green policy innovation

www.fujitsu.com/global/about/environment/

Fujitsu Green Policy Innovation is our worldwide project for reducing burdens on the environment. Using our global know-how, we aim to resolve issues of environmental energy efficiency through IT. Please find further information at:



More information

Learn more about Fujitsu, please contact your Fujitsu sales representative, Fujitsu business partner, or visit our website.

www.fujitsu.com/fts/mainboards/

Copyright

© 2015 Fujitsu Technology Solutions GmbH
Fujitsu and the Fujitsu logo are trademarks or registered trademarks of Fujitsu Limited in Japan and other countries.

Intel® C612 Chipset, Intel® Xeon® E5-26xx [V3], Intel® Xeon® E5-16xx [V3] and Intel® Core™ i7 59xx are trademarks or a registered trademark of Advanced Micro Devices, Inc. in America and other countries. Other company, product and service names may be trademarks or registered trademarks of their respective owners.

All rights reserved, including intellectual property rights. Changes to technical data reserved. Delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded.

Disclaimer

Technical data subject to modification and delivery subject to availability. Any liability that the data and illustrations are complete, actual or correct is excluded. Designations may be trademarks and/or copyrights of the respective manufacturer, the use of which by third parties for their own purposes may infringe the rights of such owner.

Contact

FUJITSU Technology Solutions
OEM Mainboard Sales
Email: oem-sales@ts.fujitsu.com

Website: <http://ts.fujitsu.com>
2016-07-26 CE EN