


No:	PIN NAME
1	GND
2	VPP
3	VSEGM
4	VCMOH
5	VSL
6	VPP
7	IREF
8	VPP
9	GND
10	VCL
11	SENSE
12	AVDD
13	FB
14	VBREF
15	SW
16	VDD
17	IM0
18	IM1
19	VDD
20	IM2
21	/CS
22	/RES
23	A0
24	/WR
25	/RD
26	D0
27	D1
28	D2
29	D3
30	D4
31	D5
32	D6
33	D7
34	VPP

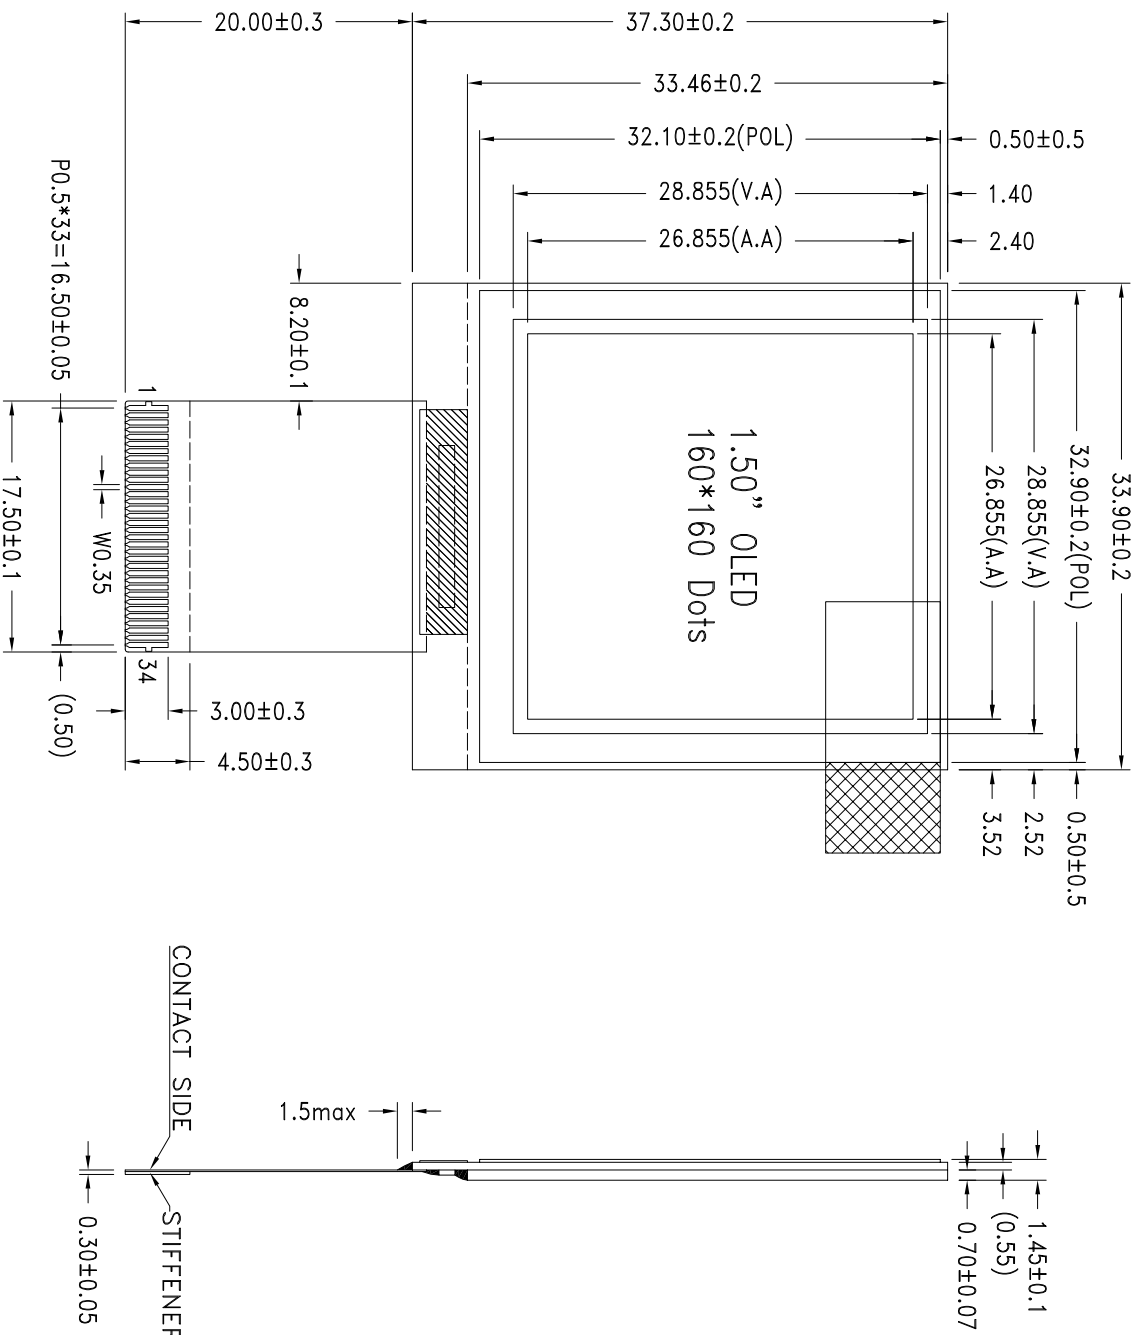

NOTES:

- 1.Modu Type : OLED / WHITE
- 2.DRIVE IC: SSH1108
- 3.OPERATING TEMP: -30°C ~ 80°C
- 4.STORAGE TEMP: -40°C ~ 85°C
- 5.General Tolerance : ±0.2mm
- 6.RoHS Compliance

DRAWN BY:		DLC Display Co., Limited	
		www.dlcdisplay.com	
CHECKED BY:	PITLE:	DLC0150BU0G	
APPROVED BY:	DWG NO.:	SCALE:	UNIT: mm
CONFIRMED BY:	DWG NAME:	SHEET NO.:	OF