


Outline Drawing



PIN	FUNCTION SYMBOL
1	VSS
2	VSS
3	VSS
4	VDD
5	VSS
6	RESFB
7	HSYNC
8	VSYNC
9	CLK
10	VSS
11	D00(CB0)
12	D01(CB1)
13	D02(CB2)
14	D03(CB3)
15	D04(CB4)
16	D05(CB5)
17	D10(G0)
18	D11(G1)
19	D12(G2)
20	D13(G3)
21	D14(G4)
22	D15(G5)
23	D20(R0)
24	D21(R1)
25	D22(R2)
26	D23(R3)
27	D24(R4)
28	D25(R5)
29	VSS
30	DE
31	STR(LS)
32	SCL
33	XL
34	YD
35	XR
36	YU
37	SDASDO
38	BLH(LED+)
39	SLLED(-)

LED CIRCUIT DIAGRAM:

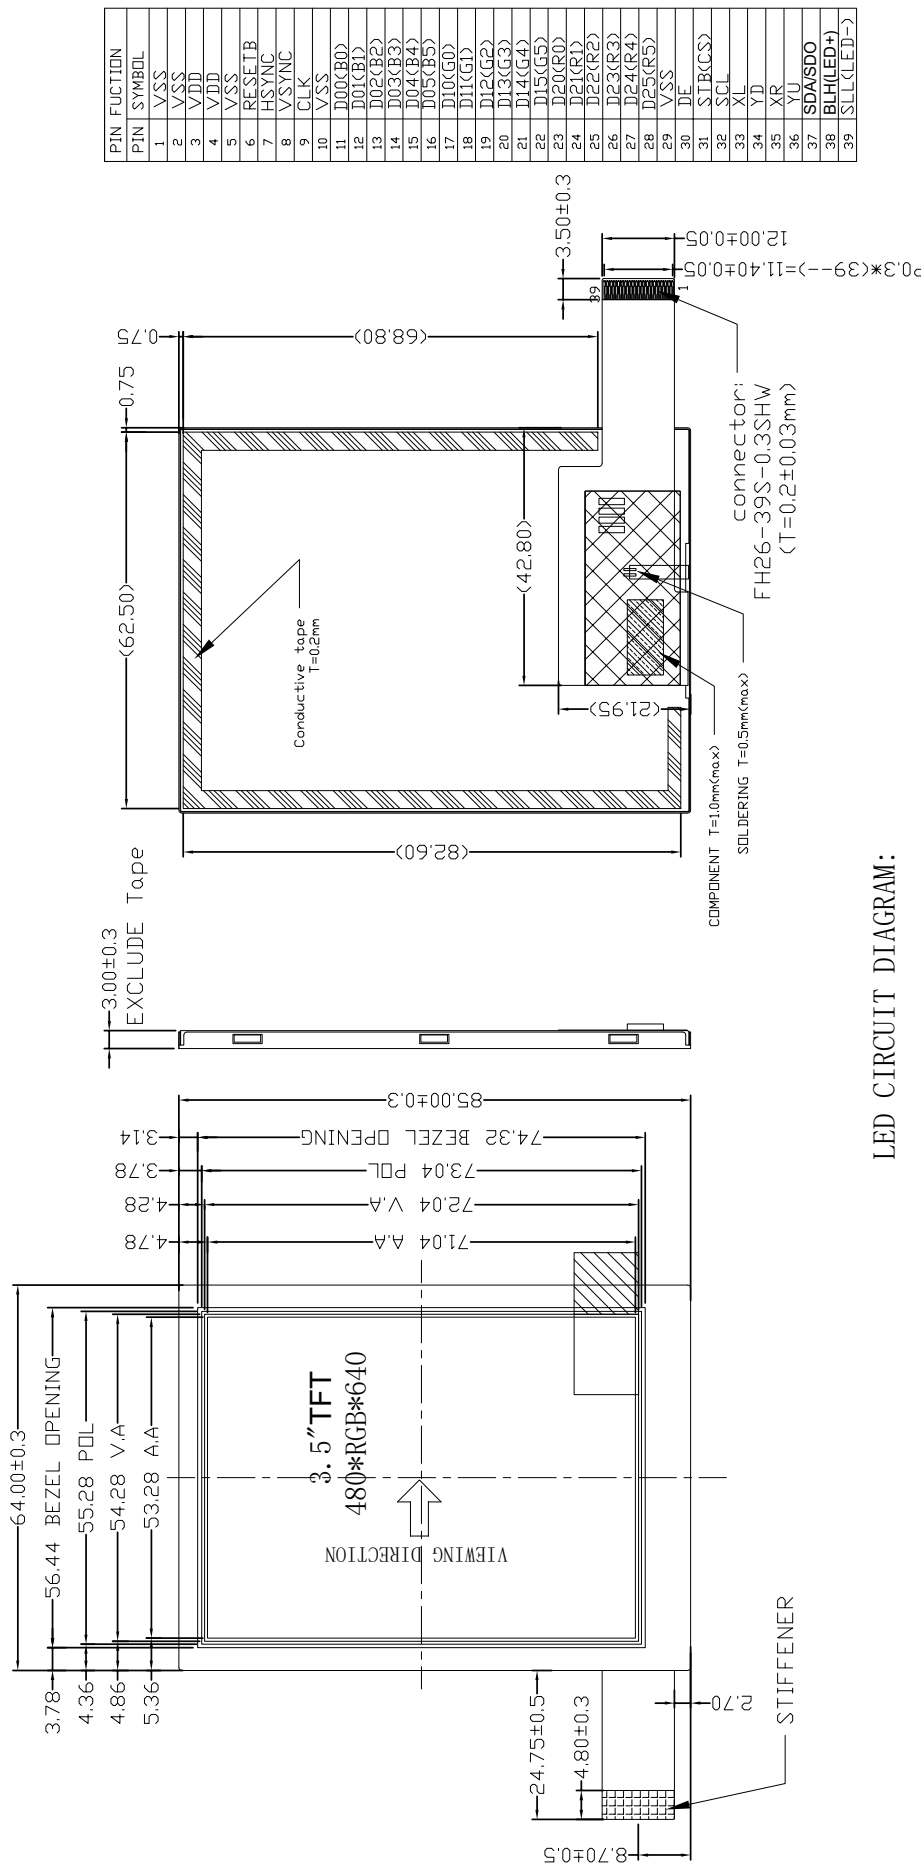

NOTES:

1. DISPLAY TYPE: 3.5TFT, TRANSMISSIVE
2. VIEWING DIRECTION : 9 O' CLOCK
3. Driver IC : HX8363
4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
5. GENERAL TOLERANCE: ±0.2
6. RoHS Compliant

DLC Display Co., Limited www.dlcdisplay.com		TITLE: DLC0350VMR	
DRAWN BY:		CHECKED BY:	
APPROVED BY:		DWG NO:	
CONFIRMED BY:		DWG NAME:	
		SCALE:	
		UNIT:	mm
		SHEET NO:	OF