


50PIN:

PIN	SYMBOL
1	LEDK
2	LEDA
3	GND
4	VDD
5	R0
6	R1
7	R2
8	R3
9	R4
10	R5
11	R6
12	R7
13	G0
14	G1
15	G2
16	G3
17	G4
18	G5
19	G6
20	G7
21	B0
22	B1
23	B2
24	B3
25	B4
26	B5
27	B6
28	B7
29	GND
30	CLK
31	DISP
32	HSYNC
33	VSYNC
34	DEN
35	NC
36	GND
37	XR
38	YD
39	XL
40	YU

TP	PIN NAME
1	NC
2	NC
3	NC
4	NC
5	GND
6	VDD
7	INT
8	WAKE
9	SCK
10	SDA

LED CIRCUIT DIAGRAM:

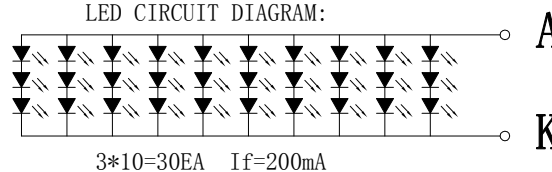

Notes:

1. Display Type: a-Si TFT
2. Display Mode: Transmissive, Normally White
3. Operating Temp.: -20°C ~ +70°C
4. Storage Temp.: -30°C ~ +80°C
5. Backlight: LED
6. Driver IC OF CTP: FT5426
7. RoHS Compliance

DLC Display Co., Limited

www.dlcdisplay.com

DRAWN BY:	TITLE: DLC0700AZG-T-1	
CHECKED BY:	DWG NO:	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:	DWG NO:	SHEET NO: OF