



PIN FUCTION	
PIN	SYMBOL
1	VCOM
2	VDD
3	VDD
4	NC
5	RESET
6	STBYB
7	GND
8	RXIN0-
9	RXIN0+
10	GND
11	RXIN1-
12	RXIN1+
13	GND
14	RXIN2-
15	RXIN2+
16	GND
17	RXCLKIN-
18	RXCLKIN+
19	GND
20	RXIN3-
21	RXIN3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	NC
28	SELB<HSD>
29	AVDD
30	GND
31	NC
32	NC
33	L/R
34	U/D
35	VGL
36	NC
37	NC
38	VGH
39	NC
40	NC

LED CIRCUIT DIAGRAM:



3*10=30EA If=200mA

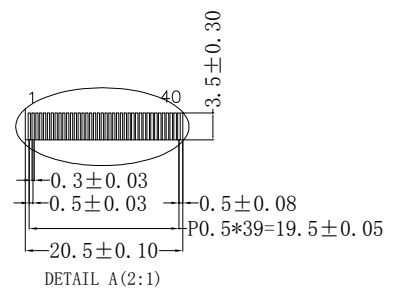

NOTES:

1. DISPLAY TYPE: 7.0TFT, NORMALLY BLACK
2. VIEWING DIRECTION : U/L/D/R 80/80/80/80
3. Driver IC : EK79001ECGA/EK73217ACGA
4. Top : -20° C ~ 70° C, Tst : -30° C ~ 80° C
5. GENERAL TOLERANCE: ±0.2
6. RoHs Complicant

DLC Display Co., Limited
www.dlcdisplay.com

DRAWN BY:	TITLE: DLC0700XZG-4	
CHECKED BY:	DWG NO:	
APPROVED BY:	DWG NAME:	UNIT: mm
CONFIRMED BY:	SHEET NO: OF	