Outline Drawing

PIN	FUCTION SYMBOL
1	NC
2	VDD
3	VDD
4	NC
5	REST
6	STBYB
7	GND
8	Rxin0-
9	Rxin0+
10	GND
11	Rxin1-
12	Rxin1+
13	GND
14	Rxin2-
15	Rxin2+
16	GND
17	RxCLK-
18	RxCLK+
19	GND
20	Rxin3-
21	Rxin3+
22	GND
23	NC
24	NC
25	GND
26	NC
27	DIMO/NC
28	SELB
29	NC
30	GND
31	NC
32	NC
33	L/R
34	U/D
35	NC
36	CABCEN1/NC
37	CABCEN0/NC
38	NC
39	NC
40	NC

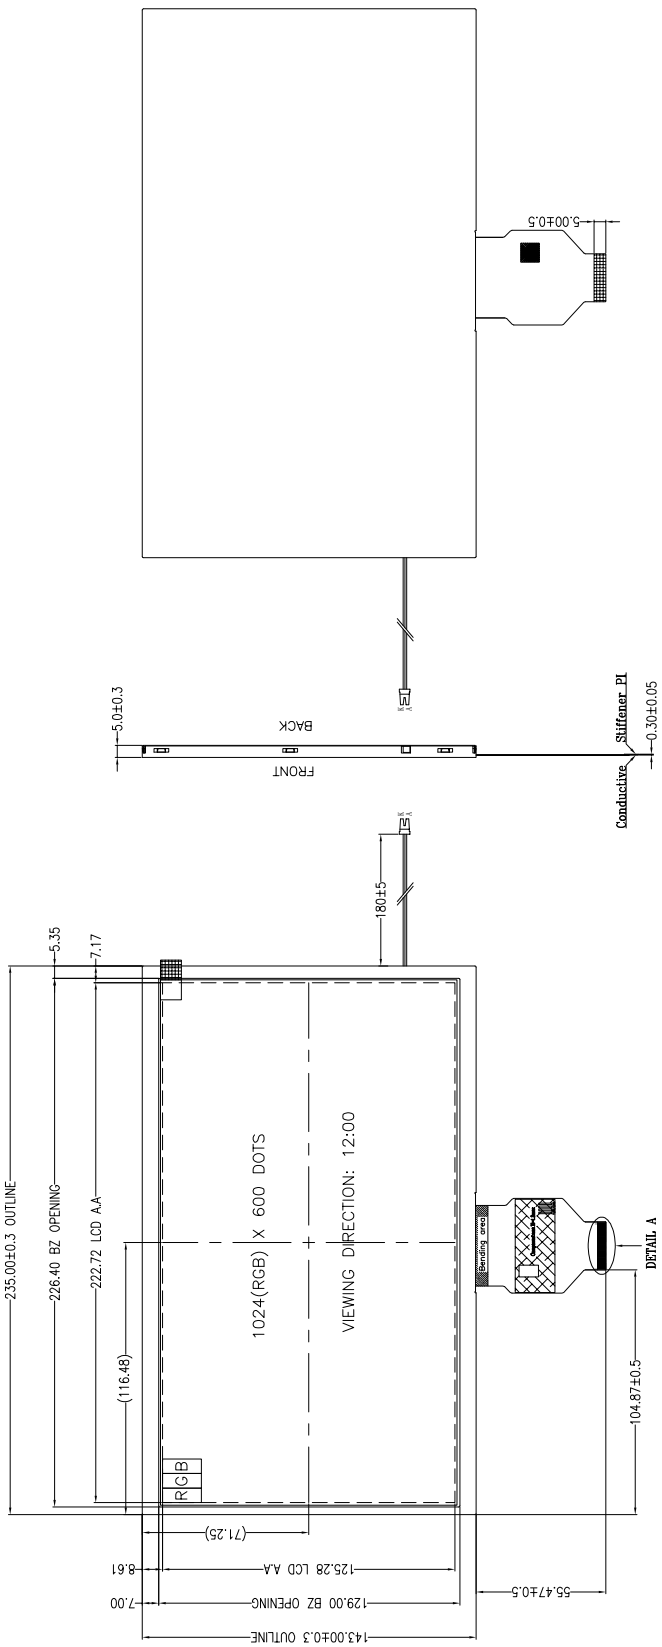





Backlight LED Circuit
3*13=39EA If=260mA

DLC Display Co.,Limited
www.dlcdisplay.com

DRAWN BY:	TITLE: DLC1010LZG		
CHECKED BY:		SCALE:	
APPROVED BY:	DWG NO:	UNIT:	mm
CONFIRMED BY:	DWG NAME:	SHEET NO:	OF

NOTES:
1. DISPLAY TYPE: TFT
2. VIEWING DIRECTION: 12:00
3. LCD DRIVE IC:Source HX8282/HX8696
4. POLARIZER MODE: TRANSMISSIVE/POSITIVE
5. VDD :
6. BACKLIGHT: 39 PCS
7. OPERATING TEMP: -20° C~+70° C
8. STORAGE TEMP: -30° C~+80° C
9. UNMARKER TOLERANCE: ±0.20
   UNMARKED FILLET RADIUS: R=0.50
10. REQUIREMENTS ON ENVIRONMENTAL PROTECTION: