

IMP-3723

Mini-PC Solution from Impact



Mini-ITX Motherboard
D3713-V/R, D3723-R, K3931-N

FOR


Industrial chassis for enhanced operating temperature range

- Compact Design (250 x 52 x 191 mm)
- Dual Front USB 3.2 Gen1 Connectors
- Low Profile Extension Slot
- Option for Internal 65W PSU Module
- Horizontal and Vertical Stand plus Wall Mount Bracket


kontron

CHASSIS DATA	DIMENSIONS COLOUR WEIGHT	250 x 52 x 191 mm (W x H x D) black ~ 1 kg
SUPPORTED MOTHERBOARDS		D3713-R D3713-V D3723-R K3931-N
ENVIRONMENTAL CONDITIONS	OPERATING TEMPERATURE	Passive heatsink (fanless): -10 °C ... +35 °C (max. 15 W TDP, vertical/horizontal position) *) -10 °C ... +40 °C (max. 12 W TDP, vertical position only) *) Active heatsink (with Fan): -10 °C ... +45 °C (max. 35 W TDP, vertical/horizontal position) *)
	HUMIDITY	5 % - 85 % relative humidity (non-condensing)
CHASSIS FAN SPECIFICATION	MTBF OPERATING TEMPERATURE	70.000 hours @ 40 °C -10 °C - 70 °C PWM (4 pin), 40 x 40 x 10 mm 1750 - 5.500 rpm (nominal)/ 900 - 5.000 rpm (nominal, from chassis revision 03) Two ball bearing
REQUIREMENTS FOR AC ADAPTER	DC OUTPUT DC OUTPUT PLUG	8 V-36 V (5 A max./65 W max.) Ø 2.5 mm/5.5 mm Important Note: Compliance with IEC 62368-1 according clause 6.2.2. to power source category PS2 ("Limited Power Source") required!
APPROVALS & CERTIFICATIONS	EMC	CE Class B, Industrial Immunity (EN 61000-6-2)
PACKAGE CONTENT		Chassis bottom/top incl. front bezel; I/O with integrated EMI gasket Dual front USB 3.2 Gen1 connector HDD carrier incl. 4 pin PWM fan Riser card holder incl. power button/power LED and intrusion switch HDD SATA cable and power cable for one drive Wall mount metal brackets Motherboard mounting Screws Chassis desk stand (horizontal/vertical, removable)
CHASSIS FEATURES	THEFT PROTECTION MOUNTING OPTIONS	Kensington lock support Mechanical lock for DC-In connector Intrusion Support WLAN antenna via (RP-) SMA connector PCIe riser (PCIe x4, low profile) Two rear COM ports (COM3, COM4) 2.5" Drive (HDD/SSD) Rear USB 3.2 Gen2 Type-C extension (K3931-N only)

*) Chassis ambient temperatur

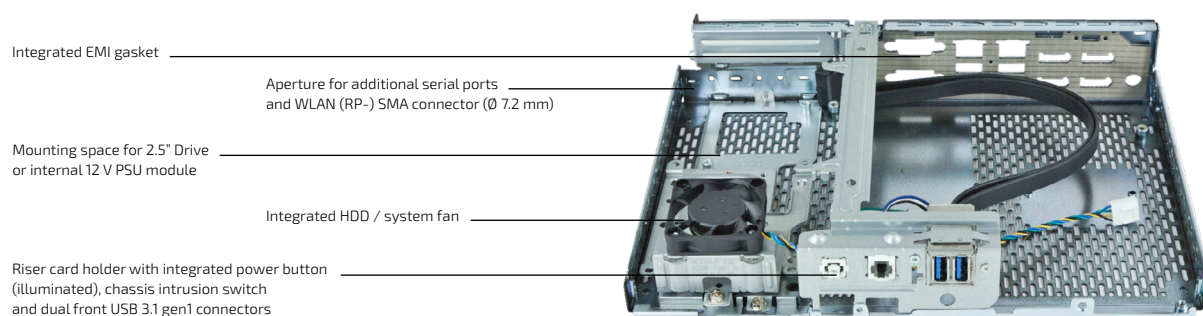

Chassis prepared for optional features

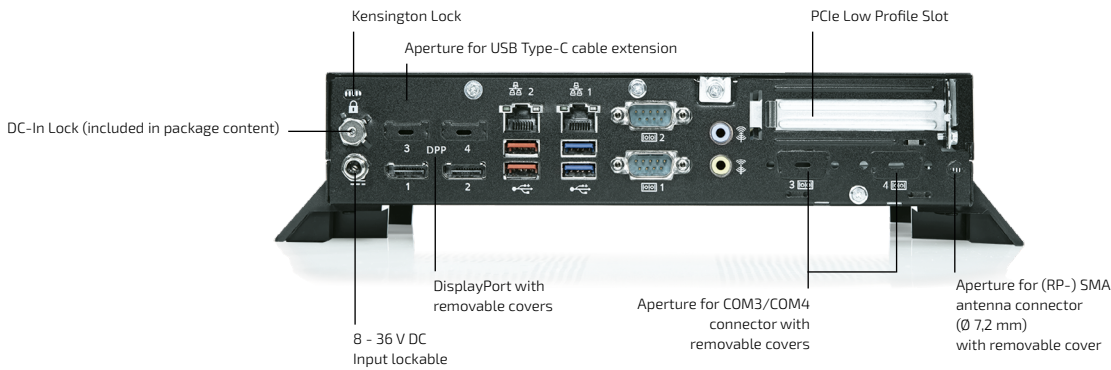

Ordering Information

ARTICLE	PART NO.	DESCRIPTION
CHASSIS KIT SOLUTION	F5000-J012*	10 pcs

Accessories

FANLESS HEATSINK KIT	S26361-F5000-C019	Passive Heatsink, max. 15 W TDP (backplate included)
SLIM ACTIVE HEATSINK KIT	S26361-F5000-C021	Active Heatsink, max. 35 W TDP (backplate included)
RISERCARD	S26361-F5000-R006	D3318-A
INTERNAL PSU MODULE	S26361-F5000-P004	12 V Internal PSU
EXTERNAL AC ADAPTER 65W@19V	S26361-F5000-P006	AC Adapter, 19 V/3.42 A, 65 W
SERIAL PORT CABLE	S26361-F5000-K010	Length = 400 mm, fullsize slot bracket
MINI PCIe TO M.2 ADAPTER	S26361-F5000-M003	Adapter for Mini PCIe to M.2 Wi-Fi modules
TPM MODULE	S26361-F5000-R012	Infineon SLB9670, TPM V2.0 (TCG compliant)
REAR USB TYPE-C EXTENSION	F5000-K013	USB 3.2 Gen2 adapter cable for internal USB Key-A socket (for K3931-N only)

* SMARTCASE S730 (F5000-J012) replaces SMARTCASE S711 (F5000-J008), and provides additional support for K3931-N (AlderLake-N series)

Global Headquarters

Kontron Europe GmbH


Gutenbergstraße 2
85737 Ismaning, Germany
Tel.: + 49 821 4086-0
info@kontron.com

www.kontron.com



D3723-R mITX

Industrial Series

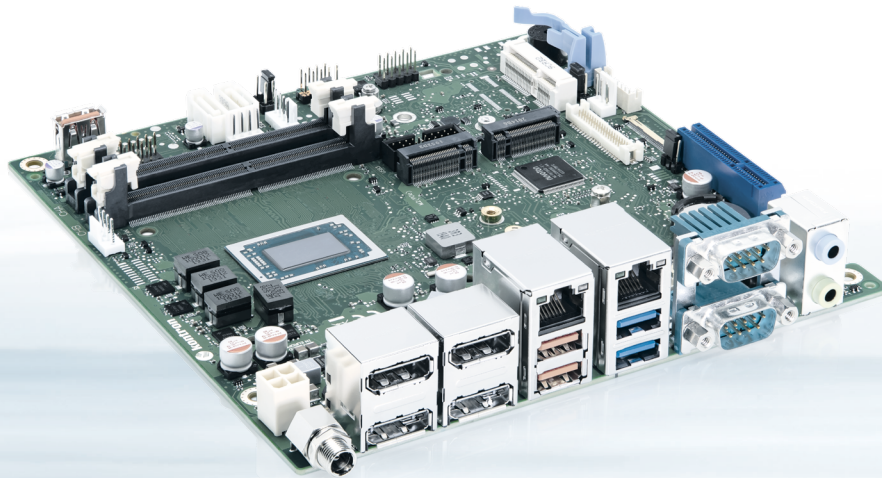

AMD Embedded R2000 Series SoC Platform for AMD FP5 SoC Processor

- ▶ AMD Radeon™ Vega Graphics (within SoC), up to 4x DisplayPort V1.4
- ▶ MS Windows 11 Support
- ▶ Dual Channel LVDS (24 Bit) and eDP V1.3 (4K) onboard
- ▶ Designed for fanless Operation
- ▶ M.2 Key-B & M.2 Key M & Mini-PCI Express® supported

POSSIBILITIES START HERE



D3723-R mITX

Industrial Series


The industrial motherboard D3723-R mITX supports the AMD Ryzen™ Embedded R2000 series processors with integrated AMD Radeon™ Vega Graphics and can be used in applications with high graphical requirements like casino gaming, medical displays, thin clients and industrial PCs.

It is equipped with up to four DisplayPorts, one embedded DisplayPort and one Dual-Channel LVDS (24bit) and powers up to four independent displays in 4K resolution. Depending on how much (graphical) performance is required, there are 4 motherboard versions with different AMD processors available.

PRODUCT HIGHLIGHTS

- ▶ AMD Radeon™ Vega Graphics (within SoC)
- ▶ Up to 4x DisplayPort V1.4
- ▶ Dual Channel LVDS (24Bit) and eDP V1.3 (4K) onboard
- ▶ PCI Express® x4 (Gen3)
- ▶ 8 Bit GPIO & HD Audio onboard
- ▶ USB 2.0 and USB 3.1 (Gen1/Gen2) onboard
- ▶ 2x SATA III; USB Stick Socket
- ▶ Onboard support for 1x M.2 SSD (Key-M: 2230/2242/2280)
- ▶ Onboard support for 1x M.2 (Key-B: 2242/3052/2260/2280)
- ▶ Onboard support for 1x Mini-PCIe (halfsize/fullsize)
- ▶ Dual GbE LAN onboard incl. Teaming Support
- ▶ AMD integrated TPM V2.0 onboard & socket for optional TPM Module

- ▶ WideRange internal/external DC Input (8 V - 34 V)
- ▶ HW Watchdog onboard
- ▶ RS-232/485/422 support onboard

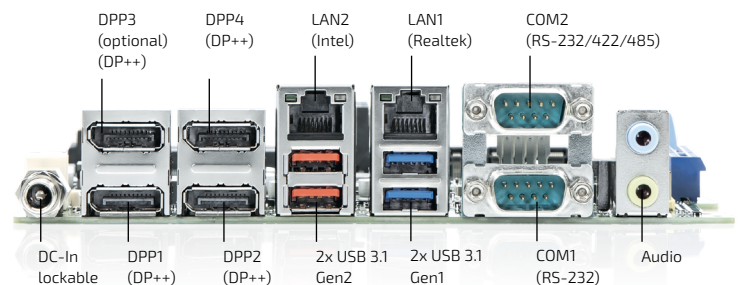

TECHNICAL INFORMATION

SYSTEM	PROCESSOR	AMD Ryzen™ Embedded R2000 Series R4: AMD Embedded R2544 R3: AMD Embedded R2514 R2: AMD Embedded R2314 R1: AMD Embedded R2312
	MEMORY	DDR4 2400/2666/3200 SDRAM, Dual Channel 2x SO DIMM sockets, up to 32 GByte memory, ECC/non-ECC
VIDEO	GRAPHICS	AMD Radeon™ Vega Graphics Up to 4x DPP V1.4 incl. DP++ support 1x embedded DP (eDP V1.3; supporting 4K resolutions) 1x Dual-Channel 24bit LVDS Following max. display combinations are supported: D3723-R2/-R3/-R4: 2x DPP + 1x LVDS + 1x eDP, 3x DPP + 1x LVDS or eDP, 4x DPP D3723-R1: 1x DPP + 1x LVDS + 1x eDP, 2x DPP + 1x LVDS or eDP, 3x DPP
AUDIO	AUDIO CODEC AUDIO INTERFACE	Realtek ALC256 5.1-channel, High Definition Audio Codec
NETWORK CONNECTION	ETHERNET	Intel® i210 & Realtek RTL8111H with 10/100/1000 MBit/s, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display, Teaming Support
PERIPHERAL CONNECTION	USB SERIAL PORT OTHER I/Os	2x USB 2.0 (by header), 2x USB 3.1 Gen1, 2x USB 3.1 Gen1 (by header), 2x USB 3.1 Gen2, 1x USB 2.0 stick socket 1x RS232/422/485; 3x RS232 (2x by header) GPIO (by header)
STORAGE & EXPANSION	SATA PCIe/PCI SLOTS	2x Serial ATA III 600 Interface (up to 6Gbit/s), NCQ, AHCI, 1x M.2 PCIe x4 (Key-M: 2230/2242/2280), 1x Mini PCIe (Gen3, halfsize/fullsize) 1x PCIe x4 Gen3; 1x M.2 PCIe x2/USB 2.0/SATA (Key B: 2242/3052/2260/2280) Note (M.2 Key-M): D3723-R1: M.2 Key-M socket shared with PCIe x4 slot (M.2 or PCIe slot usable; BIOS Setup option) Supports PCIe-based NVME SSD modules Note (M.2 Key-B): D3723-R1: PCIe x1 D3723-R2/-R3/-R4: PCIe x2 SATA line shared with onboard SATA Port1 (only if a SATA-based M.2 module is installed) Supports PCIe-based NVME SSD modules, SATA-based SSD modules, and industrial multipurpose modules based on PCIe / SATA / USB

TECHNICAL INFORMATION

POWER	CONNECTOR	External/Internal DC-In (DC Jack/4-Pin Mini-Fit) DC Input 8 V - 34 V (max. 10 A /max. 130 W)
FIRMWARE	INPUT VOLTAGE	
	BIOS	AMI Aptio 5.x (UEFI) BIOS modified and adapted by Kontron; Recovery BIOS, SM-BIOS (DMI), BIOS Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3/S4, Wake on time from S5. Boot support for M.2 SSD (AHCI / NVME), Watchdog Support No legacy OS support, no MBR installation (UEFI only) 3 level HW Watchdog (BIOS POST/BIOS Boot/OS) Integrated AMD integrated TPM V2.0
	WATCHDOG	
	REAL TIME CLOCK	
	TPM	
SYSTEM CONTROL	FP HEADER	1x Header for Reset button, HDD LED, Power button, Power LED
	SECURITY	Recovery BIOS, System and BIOS Password, Boot Sequence Control, Serial-/USB-Port Access Protection, Write Protection for Flash BIOS, EraseDisk (BIOS Feature), AMD integrated TPM V2.0, socket for optional TPM upgrade module
COOLING	FAN	2x PWM fan (CPU/System)
SOFTWARE	OS SUPPORT	MS Windows 10/MS Windows 11 Linux-64 No legacy OS support, no MBR installation (UEFI only)
MECHANICAL	DIMENSIONS (L x W)	Mini-ITX: 6.7" x 6.7" (170 x 170 mm)
CERTIFICATION	EMC & SAFETY	CE Class-B, UKCA cTUVus acc. IEC62368-1

MOTHERBOARD VERSIONS

	PROCESSOR (APU) ^{*)}	GRAPHICS RADEON™ VEGA	MAX. MEMORY SPEED
-R4	R2544 Quad-Core 3.35/3.7 GHz ^{**)} Supported TDP Limits: 54 W ^{***)} /45 W/35 W	GPU @ 1.3 GHz 8x CU ^{****)} up to 4 displays (eDP, LVDS, DPP1, DPP2, DPP3, DPP4)	DDR4-3200 Two sockets (ECC supported)
-R3	R2514 Quad-Core 2.1/3.7 GHz ^{**)} Supported TDP Limits: 35 W ^{***)} /25 W/15 W/12 W	GPU @ 1.2 GHz 8x CU ^{****)} up to 4 displays (eDP, LVDS, DPP1, DPP2, DPP3, DPP4)	DDR4-2666 Two sockets (ECC supported)
-R2	R2314 Quad-Core 2.1/3.5 GHz ^{**)} Supported TDP Limits: 35 W ^{***)} /25 W/15 W/12 W	GPU @ 1.2 GHz 6x CU ^{****)} up to 4 displays (eDP, LVDS, DPP1, DPP2, DPP3, DPP4)	DDR4-2666 Two sockets (ECC supported)
-R1	R2312 Dual-Core 2.7/3.5 GHz ^{**)} Supported TDP Limits: 25 W ^{***)} /15 W/12 W	GPU @ 1.2 GHz 3x CU ^{****)} up to 3 displays (eDP, LVDS, DPP1, DPP2, DPP4)	DDR4-2400 Two sockets (ECC supported)

^{*)} APU = Accelerated Processing Unit
^{**)} CPU Base Frequency / Boost Frequency
^{***)} Default TDP
^{****)} CU = Compute Units

POWER SUPPLY REQUIREMENTS

SOURCE	VOLTAGE RANGE	MIN. PS LOAD	MAX. VOLTAGE TOLERANCE	TYP. MOTHERBOARD INPUT POWER*	MAX. MOTHERBOARD INPUT POWER**
DC-IN (wide range)	8 V - 34 V (recommended nominal range) 7.6 V - 36 V (absolute maximum ratings)	0 A	± 5 %	<10 W/40 W	130 W

^{*)} Motherboard incl. Memory and M.2 NVME SSD (approximations for MS Windows 10 Idle Mode / Full Processor Load @ 25 W TDP)
<sup>**) Motherboard incl. Memory, M.2, PCIe/Mini-PCIe devices, USB Devices, LVDS / eDP devices, SATA devices
 See TechNotes document for detailed power requirements</sup>

TECHNICAL INFORMATION

FEATURES

Chipset / SoC (APU)
DPP / HDMI / LVDS / eDP
Buzzer / int. Speaker Support (stereo)* / 5.1 Multichannel Audio
GbE LAN / Dual GbE LAN / 2.5GbE LAN / M.2 2230 WLAN-BT**
WoL / PXE / LAN Teaming / TSN
SATA / SATA RAID / M.2 (SATA) / M.2 (PCIe/NVME)
Mini-PCIe / USB 2.0 / USB 3.1 (Gen1) / USB 3.1 (Gen2)
FAN monitored & controlled CPU / AUX1 / AUX2
TEMP monitored CPU / onboard sensors / external sensor

AMD Ryzen™ Embedded

+ / - / + / +
+ / + / +
+ / + / - / -
+ / + / + / -
+ / - / + / +
+ / + / + / +
+ / + / -
+ / + / -

SPECIAL FEATURES

COM interface support for RS-232 / RS-485 / RS-422
Silent Fan / System Guard
Recovery BIOS / Multi Boot
HDD Password / EraseDisk / TPM V2.0 onboard / optional TPM module
BIOS POST- / BIOS Boot- / OS- HW Watchdog
Operating Mode 24-7 / 8-5 (hrs per day - days per week)
Motherboard operating temperature range (chassis inside)***

+
+ / +
+ / +
+ / + / + / +
+ / + / +
+ / -
-10 °C ... +60 °C

INTERNAL CONNECTORS

SO DIMM Sockets (DDR4 3200/2666/2400)
SATA-III / M.2 Key-M SSD / M.2 Key-B / M.2 2230 WLAN-BT / Mini-PCIe
Front Panel Audio (9-Pin, HD Audio) / SP-DIF Out (Digital Audio)
USB 2.0 pin header (provides 2 USB channel) / USB Stick socket****
USB 3.1 Gen1 pin header (provides 2 USB channels)*****
Serial COM3 header***** / Serial COM4 header***** /
Parallel Port header
LVDS / LVDS Backlight / Embedded DisplayPort @ 4 lanes
FAN PSU / CPU (PWM) / AUX1 (PWM)
Intrusion (Case Open) / GPIO (8 Bit) / SMBus (Case Temp.)
Stereo Speaker header / Digital Mic header
Front Panel (Power Switch, Reset Switch, LEDs, Intel 10 pin header)
SATA Drive Power Connector (5 V/12 V) / DC-In Connector 8 - 34 V (4 pin)

2
2 / 1 / 1 / - / 1
1 / 1
1 / 1
1
1 / 1 /
-
1 / 1 / 1
- / 1 / 1
1 / 1 / -
1 / -
1
1 / 1

EXTERNAL CONNECTORS

DisplayPort V1.4 / HDMI / DVI / VGA
Audio Mic. In / Line in / Line out (or driver configuration)
LAN (RJ-45) / PS/2 Keyboard / Mouse
USB 2.0 / USB 3.1 Gen1 / USB 3.1 Gen2
DC-In connector (external input) 8 - 34 V @ 10 A max.; lockable
Serial COM interface*****

up to 4 / - / - / -
- / 1 / 1
2 / - / -
0 / 2 / 2
1
2

*) Stereo speaker support; 2 W @ 4Ω

**) M.2 WLAN possible via Mini-PCIe to M.2 converter module D3436-S

***) Forced cooling required for high operating temperature range. See TechNotes document for details


****) USB 2.0

*****) USB3 connector includes separate USB2.0 signal pins (2 channels)

*****) COM3 / COM4; RS-232 @ reduced feature set / pin count; see TechNotes document for details

*****) RS-232; Thereof one port (COM2) supporting RS-232/RS-422/RS-485

CONNECTOR / SOCKET DIAGRAM

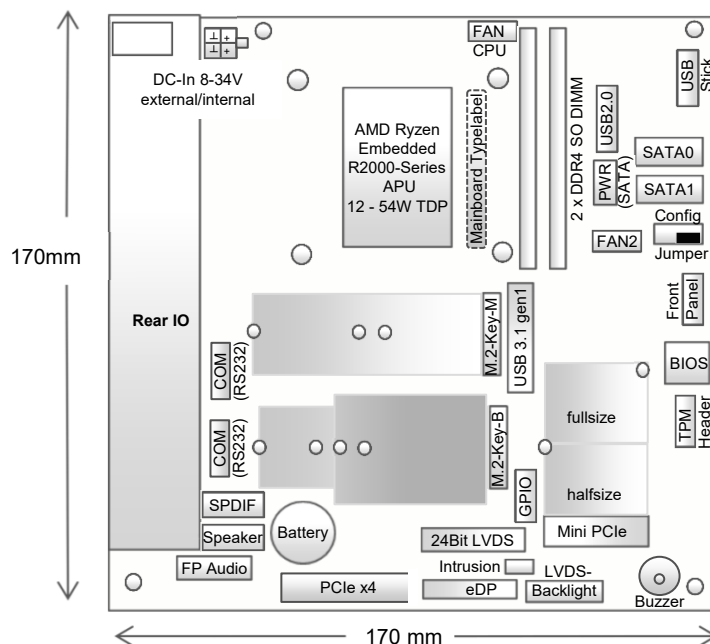

► ORDERING INFORMATION

ARTICLE	PART NO.	DESCRIPTION
D3723-R4	F5120-V202	AMD Embedded R2544 SoC
D3723-R3	F5120-V201	AMD Embedded R2514 SoC
D3723-R2	F5120-V200	AMD Embedded R2314 SoC
D3723-R1	F5120-V199	AMD Embedded R2312 SoC
ACCESSORIES		
SLIM ACTIVE HEATSINK + BACKPLATE	F5000-C021	max. 35 W TDP
ACTIVE HEATSINK + BACKPLATE	F5000-C020	max. 54 W TDP
FANLESS HEATSINK + BACKPLATE	F5000-C019	max. 15 W TDP
RISERCARD	F5000-R006	1x PCIe X4
SERIAL PORT CABLE	F5000-K010	400 mm, fullsize slot bracket
MINI PCIE TO M.2 ADAPTER	F5000-M003	Adapter for Mini PCIe to M.2 Wi-Fi modules
AC-ADAPTER 19V/65W	F5000-P006	For applications up to 35 W TDP (SoC)
AC-ADAPTER 20V/120W	F5000-P007	lockable connector
INTERNAL PSU KIT	F5000-P004	12 V/65 W, designed for SMARTCASE™ chassis
DRIVE POWER CABLE	F5000-K001	400 mm, power connector for 1x SATA and 1x slimline DVD
TPM MODULE	F5000-R012	Infineon SLB9670, TPM V2.0 (TCG compliant)
SMARTCASE S711	F5000-J008	Chassis kit solution for D3713 & D3723

► GLOBAL HEADQUARTERS

Kontron Europe GmbH

Gutenbergstraße 2
85737 Ismaning, Germany
Tel.: +49 821 4086-0
Fax: +49 821 4086-111
info@kontron.com

www.kontron.com