

IMP-3921-H1

Mini-PC Solution from Impact
with Intel N100



Only 6.5" x 5.8" x 1.4"

Industrial PC for enhanced operating temperature range

(See pages below for motherboard data sheet - standalone MB available for sale as well)

- Ultra-Compact Design
- 36 x 147 x 165 mm
- Front & Rear USB
- Horizontal or Vertical Operation
- VESA- and Wall Mount Option

Technical Information

CHASSIS DATA	DIMENSIONS COLOUR WEIGHT	36 x 147 x 165 mm (W x H x D) black ~ 0.4 kg
ENVIRONMENTAL CONDITIONS	OPERATING TEMPERATURE*	Passive Cooling: -0 °C ... +35 °C ** --> See IMP-3921-N version for -40 to +70C -Active Cooling: -0 °C ... +40 °C (up to 15 W TDP, any position)
	HUMIDITY	5 % - 85 % relative humidity (non-condensing)
APPROVALS & CERTIFICATIONS	EMC	Planned: CE Class B, Industrial Immunity (EN 61000-6-2), FCC Class B verified
PACKAGE CONTENT		Chassis desk stand (vertical mode, removable) Rubber feet (horizontal mode, removable) Chassis bottom/top incl. front bezel; Rear I/O with integrated EMI gasket
CHASSIS FEATURES	THEFT PROTECTION MOUNTING OPTIONS	Kensington lock support Integrated WLAN antennas Wall Mount VESA Kit DC-in holder Cooling solution Rear COM port
REQUIREMENTS FOR AC ADAPTER	SAFETY	Compliance with IEC 62368-1 according clause 6.2.2. to power source category PS2 ("Limited Power Source") required!


* Chassis ambient temperature; upper limit depends on system configuration

** Limited cooling performance in horizontal operating mode; possible system performance reduction.
Vertical operating position recommended for most favorable cooling & system performance




Heatsink (built-in)

- Specific passive heatsink designed for PC
- Max. TDP tbd
- Weight ~ 180g

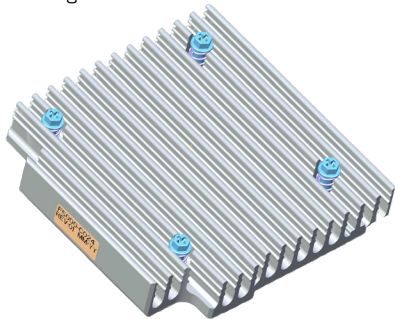

Chassis Front/Rear View (Horizontal Position)

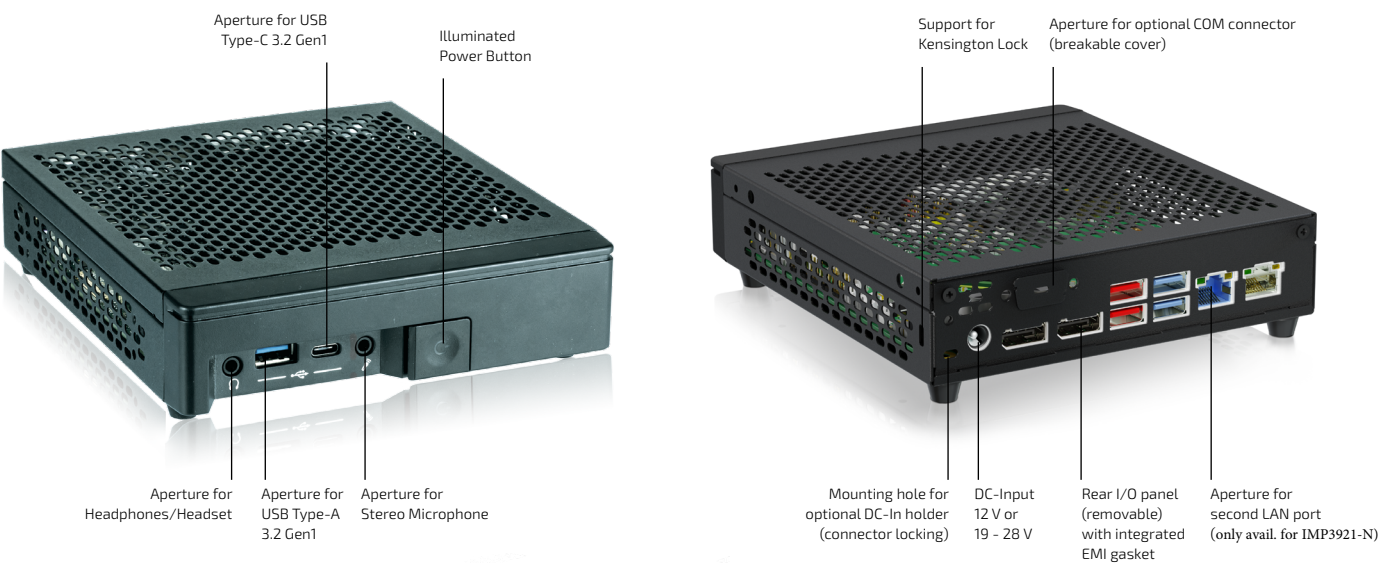


Overview Chassis Configuration/Options

	K3921-H	K3921-Nx
Chassis Rear Wall (up to 2x Graphics + COM) included in chassis kit	yes	yes
Passive Cooling (F5000-C024) supported	yes	yes
Active Cooling (F5000-C026) supported	yes	yes
Rear COM Port Option S26361-F5000-K007 supported	yes	yes
2nd LAN Port supported	no	yes

K3921-H1 mSTX

Extended Lifecycle Series

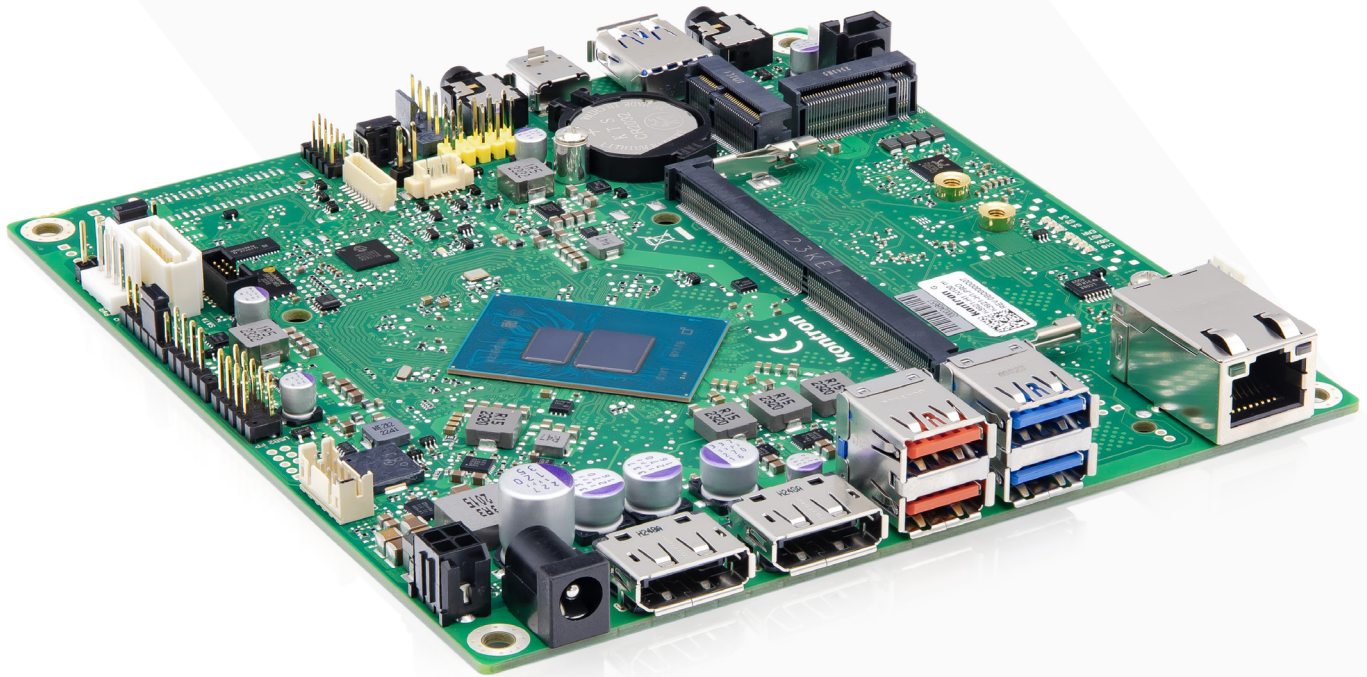

Made in Germany

w. Intel® Processor N100 (Alder Lake N)


- › Latest DDR5 memory technology for best-in-class system performance
- › Intel® UHD Gen12 Graphics - driven by Intel® X^e architecture (within SoC)
- › Up to 2x DisplayPort™ 1.4a and 1x DisplayPort™ over USB Type-C
- › eDP V1.4b (4 K) onboard
- › Designed for fanless operation

K3921-H mSTX Extended Lifecycle

The Extended Lifecycle mSTX Motherboard K3921-H is based on the latest Intel® Intel® Processors series (Alder Lake N-100) with powerful UHD Gen12 graphics using Intel® Xe architecture. There are two DisplayPorts™ and one DisplayPort™ via front USB-Type-C plus on-board embedded DisplayPort™. Three independent displays with up to 4K resolution (2x 4K + 1x FHD) are supported. The K3921-H is equipped with an M.2 Key-M connector with PCIe and SATA support and in addition to this an M.2

slot for WLAN/Bluetooth modules (PCIe and CNVi) and other PCIe based add on cards is also included. Via the front USB-Type-C the K3921-H supports PowerDelivery Sink mode, USB 3.2 Gen1 and DisplayPort™ Alternate Mode (DPoC). This makes it the perfect fit for Thin Client applications, in combination with our very compact chassis. All components are designed and approved for 24/7 continuous operation.

- Intel® Processors N Series
- cTDP – Easy & flexible reduction of CPU TDP down to 6 W
- DDR5-4800 SODIMM, max 32 GByte
- Intel® UHD Gen12 Graphics (within SoC)
- 2x DisplayPort™ V1.4a + USB Type-C Alt mode (DPoC)
- eDP V1.4b
- HD Audio onboard
- 3x USB 2.0, 3x USB 3.2 Gen1, 2x USB 3.2 Gen2
- 1x USB 3.2 Gen1 (Front Type-C) with DP Alt mode
- 1x Realtek GbE LAN
- 1x SATA 6G
- 1x M.2 2230/2242/2280 (Key-M, PCIe x1 Gen3 NVMe SSD + SATA SSD)
- 1x M.2 2230 (Key-E, WLAN/Bluetooth modules, PCIe and CNVi support)
- Intel® integrated iTPM V2.0
- 1x RS-232 support onboard
- DualRange internal/external DC input (12V / 19-28V), PowerDelivery Sink Mode (20V DC-In via USB-C)

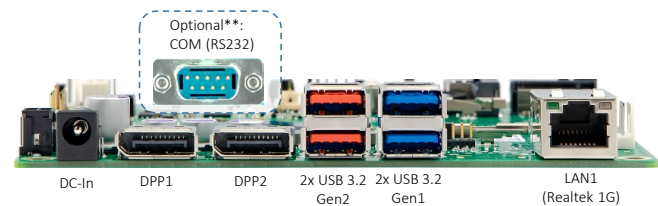

*) Prepared for SMARTCASE™ S501 chassis kit
**) Via optional COM port cable. Breakout feature SC501 chassis rear I/O

Technical Information

SYSTEM	PROCESSOR	Intel® Alder Lake N SoC series H1: Intel® Processor N100 (4C/6W) SoC
	MEMORY	DDR5 4800 SDRAM 1x SO DIMM socket, up to 32 GByte memory, non-ECC
VIDEO	GRAPHICS	Intel® UHD Graphics driven by Intel® Xe with 24 execution units (EUs) Up to 3 external DisplayPorts™ V1.4a (2x DPP, 1x DPoC ¹ , up to 4K resolution ²) 1x Embedded DP (eDP V1.4b up to 4K resolution ³) Following max. display combinations are supported: 2x DPP + 1x DPoC / 2x DPP + eDP / 1x DPP + 1x DPoC + eDP
	AUDIO CODEC AUDIO INTERFACE	Realtek ALC256 Stereo, High Definition Audio Codec
NETWORK CONNECTION	ETHERNET	Realtek RTL8111H with 10/100/1000 MBit/s, Wake-on-LAN (WoL) by interesting Packets, Link Status Change and Magic Packet™, PXE Support, BIOS MAC Address Display, Teaming Support
PERIPHERAL CONNECTION	USB	3x USB 2.0 (by headers) 2x USB 3.2 Gen1 (Rear), 1x USB 3.2 Gen1 (Front), 1x USB 3.2 Gen1 Type-C (Front) 2x USB 3.2 Gen2 (Rear) 1x RS232 (by header)
	SERIAL PORT	

1) DPoC: DisplayPort™ over USB-Type-C (Alternate Mode)
2) 3x 4K support only with K39xx-N2 (N97). All other boards: 2x 4K + 1x FHD
3) 4K Resolution on eDP only with K39xx-N2 (N97)

STORAGE & EXPANSION	SATA PCIe/M.2 SLOTS	1x Serial ATA III 600 Interface (up to 6Gbit/s), NCQ, AHCI, 1x M.2 PCIe 2230/2242/2280 (Key-M, PCIe x1 Gen3 + SATA, for NVMe and SATA SSD) 1x M.2 PCIe 2230 (Key-E, WLAN PCIe and CNVi support/Bluetooth USB modules)
POWER	CONNECTOR INPUT VOLTAGE	External/Internal DC-In (DC Jack/4-Pin Micro-Fit) DC Input 12V or 19-28V, max. 5A/100W (external DC-In), max. 10A/100W (internal DC-In) USB-C PowerDelivery (Sink, 20V, max. 100 W)
FIRMWARE	BIOS WATCHDOG REAL TIME CLOCK TPM	AMI Aptio 5.x (UEFI) BIOS modified and adapted by Kontron; Recovery BIOS, SM-BIOS (DMI), BIOS and CPU Microcode Update, Quick Boot, Logo Boot, Quiet Boot, Plug & Play, Automatic DRAM and PCIe Configuration, BIOS Support for S.M.A.R.T., Advanced Power Management, ACPI S3/S4, Wake on time from S5. No legacy OS support, no MBR installation (UEFI only) BIOS POST-/BIOS BOOT Watchdog Integrated TPM V2.0 (Intel® integrated)
SYSTEM CONTROL	FP HEADER SECURITY	1x Header for Reset button, HDD LED, Power button, Power LED Recovery BIOS, System and BIOS Password, Boot Sequence Control, Serial-/USB-Port Access Protection, Write Protection for Flash BIOS, EraseDisk (BIOS Feature), Intel integrated TPM V2.0
COOLING	FAN	1x PWM fan
SOFTWARE	OS SUPPORT	MS Windows® 10, MS Windows® 11, MS Windows® 10 IoT, Linux-64 No legacy OS support, no MBR installation (UEFI only)
MECHANICAL	DIMENSION (L x W)	Mini-STX: 5.5" x 5.8" (140 x 148 mm)
ENVIRONMENTAL	OPERATION TEMPERATURE	0 °C - 50 °C
CERTIFICATION	EMC + SAFETY	cTÜVus acc. IEC62368-1, CE Class B, UKCA, FCC-B verified

Motherboard Versions

	PROCESSOR (SoC)	GRAPHICS Intel® UHD Gen12 Gfx	MEMORY
K3921-H1	Intel® Processor N100 Quad-Core @ 6 W TDP 0.8/3.4/2.9 GHz*	GPU @ 0.4/0.75 GHz 24x EU Up to 3 displays (2x 4K + 1x FHD)	DDR5-4800 One socket Max. 32 Gbyte

*) Base Frequency / 1 core Turbo / Multi core Turbo

**) cTDP - Easy & flexible reduction of CPU TDP down to 6 W

Power Supply Requirements

SOURCE	VOLTAGE RANGE	MIN. PS LOAD	MAX. VOLTAGE TOLERANCE	TYP. MOTHERBOARD INPUT POWER ¹	MAX. MOTHERBOARD INPUT POWER ²
DC-IN (auto dual range)	12V / 19-28V	0 A	12 V: +/- 10 %; 19-28 V: +10 %/-15 %	<10 W / 25 W	100 W (external or internal DC-In)
USB-C	20V PD Sink	0 A	20V: +/-5%	<10W / 25W	100 W

1) Motherboard incl. Memory and M.2 NVME SSD (approximations for MS Windows® 10 Idle Mode / Full Processor Load @ 15 W TDP

2) Motherboard incl. Memory, M.2, PCIe/M.2 PCIe devices, USB

See TechNotes document for detailed power requirements

FEATURES	Chipset / SoC (APU) DPP / HDMI / LVDS / eDP Stereo Audio / 5.1 Multichannel Audio / Front Panel Audio Buzzer / int. Speaker Support (stereo) ² GbE LAN / Dual GbE LAN / 2.5GbE LAN WoL / PXE / LAN Teaming / TSN SATA / SATA RAID / M.2 (SATA) / M.2 (PCIe/NVME) USB 2.0 / USB 3.2 (Gen1) / USB 3.2 (Gen2) / USB 3.2 (Gen1) Type-C FAN monitored & controlled CPU / AUX1 / AUX2 TEMP monitored CPU / onboard sensors / external sensor	Intel® Alderlake-N SoC + / - / - / + + / 0 ¹ / + + / + + / - / - + / + / - / - + / - / + / + + / + / + / + + / - / - + / + / -
SPECIAL FEATURES	COM interface support for RS-232 / RS-485 / RS-422 Silent Fan / System Guard Recovery BIOS / Flash Update / Multi Boot HDD Password / EraseDisk / TPM V2.0 onboard / optional TPM module BIOS POST- / BIOS Boot- / OS- HW Watchdog Operating Mode 24-7 / 8-5 (hrs per day - days per week) Motherboard operating temperature range (chassis inside) ³	+ / - / - + / + + / + / + + / + / + / - + / + / - + / - 0 °C ... +50 °C
INTERNAL CONNECTORS	SO DIMM Sockets (DDR5 4800) SATA-III / M.2 Key-M SSD / M.2 Key-B M.2 2230 (Key-E for WLAN/Bluetooth) Front Panel Audio (9-Pin, HD Audio) / S-PDIF Out (Digital Audio) USB 2.0 pin header (2 port) / USB 2.0 single port header / USB Stick socket USB 3.2 Gen1 pin header (2 ports) / USB 3.2 Gen2 Type A header Serial COM header / CCTalk header / Parallel Port header LVDS / LVDS Backlight / Embedded DisplayPort™ @ 4 lanes FAN PSU / CPU (PWM) / AUX1 (PWM) Intrusion (Case Open) / GPIO (8 Bit) / SMBus Stereo Speaker header / Digital Mic header Front Panel (Power Switch, Reset Switch, LEDs, Intel 10 pin header) ⁴ SATA Drive Power Connector (5 V/12 V) / DC-In Connector 12 V/19-28 V (4 pin)	1 1 / 1 / 0 1 1 / 1 1 / 1 / 0 0 / 0 1 / 0 / - 0 / 0 / 1 - / 1 / 0 1 / 0 / 0 1 / - 1 1 / 1
EXTERNAL CONNECTORS	HDMI / DVI / VGA DisplayPort™ / USB Type-C Alternate Mode (DPoC) Audio Mic. In / Line in / Line out (or driver configuration) LAN (RJ-45) / PS/2 Keyboard / Mouse USB 2.0 / USB 3.2 Gen1 / USB 3.2 Gen2 DC-In connector (external input) 12 V/19-28 V @ 5A max. Serial COM interface	- / - / - 2 / 1 1 / 0 / 1 1 / - / - 0 / 4 / 2 1 0


1) Multichannel audio only via S/PDIF or DPP

2) Stereo speaker support; 2 W @4Ω

3) Forced cooling required for high operating temperature range. See TechNotes document for details

4) Header pin pitch is 2.0mm

Connector/Socket Diagram

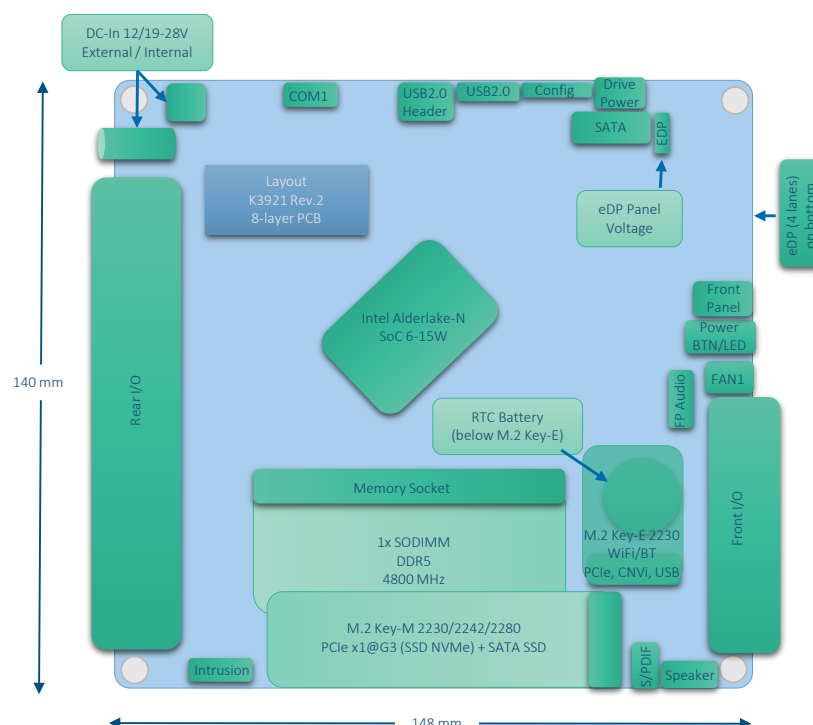

ARTICLE	PART NO.	DESCRIPTION
K3921-H1 mSTX	F5120-V243	Intel® Processor N100 (4C, 6 W)

Accessories

SLIM ACTIVE HEATSINK + BACKPLATE	F5000-C026	max. 15W TDP, designed for PC
SLIM PASSIVE HEATSINK + BACKPLATE	F5000-C024	max. 12W TDP, designed for PC
AC-ADAPTER 19V/65W	S26361-F5000-P006	For applications up to 35 W TDP (SoC)
AC-ADAPTER 20V/120W	S26361-F5000-P007	lockable connector
DRIVE POWER CABLE	S26361-F5000-K001	400 mm, power connector for 1x SATA and 1x slimline DVD
SERIAL PORT CABLE	S26361-F5000-K007	Short cable (120 mm), w/o slot bracket
SERIAL PORT CABLE	S26361-F5000-K010	400 mm, fullsize slot bracket
WLAN ANTENNA KIT	S26361-F5000-W005	WLAN antenna kit; left (grey)/right (black) antennas incl. cable for SMARTCASE™ S5xx. M.2 WLAN module not included!
WLAN ANTENNA KIT	F5000-W006	Box contains 10 dual antennas (incl. antenna cable) for SMARTCASE™ S5xx series. Additional support for WiFi 6E/WiFi 7; replaces F5000-W005
CHASSIS INTRUSION KIT		Chassis solution for K3921, active or passive cooling
WALL MOUNT BRACKETS	S26361-F5000-X001	Suitable for SMARTCASE™ S5xx, 2x Brackets per chassis incl. screws
VESA MOUNT KIT	S26361-F5000-X002	Suitable for SMARTCASE™ S5xx
DC-IN CONNECTOR LOCK	S26361-F5000-X003	Suitable for SMARTCASE™ S5xx, fits to AC-Adapter F5000-P006
CHASSIS INTRUSION KIT	F5000-K017	Contains 20x chassis intrusion cable plus 20x mounting bracket for PC

Your Contact

Impact Components, LLP
 6010 Cornerstone Ct.
 San Diego, CA 92121 USA
 Tel: 858-634-4814
contact@impactcomponents.com

www.impactcomponents.com